



FLAT TOP SELF-DRILL SCREW


SELF-DRILL POINT, YELLOW ZINC, GALVANIZED

Designed to eliminate bulging underneath your plasterboard. Suitable for light gauge steel connections with the self-drilling screw point.



PRODUCT SPECIFICATION

- 10 gauge / 16 threads per inch
- Flat top head
- Phillips drive no.2
- Self drilling point no.3
- Drill capacity: 1.5 - 3.0 mm combined material
- Heat treated carbon steel.
- Coated in electroplated zinc yellow or class 3 mechanically galvanized

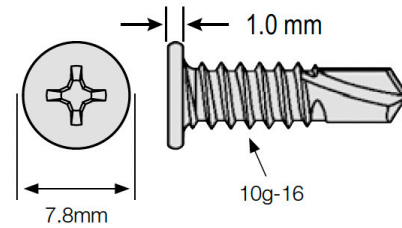

TECHNICAL SPECIFICATIONS

MECHANICAL PROPERTIES

Size	Single Shear (N)	Axial Tensile (N)	Tensional Strength (N/in)
10-16 x 5/8	5600	11900	0.252139

PULL OUT DATA (kN) G450 Steel

Size	0.039" G450 Steel	0.047" G450 Steel	0.059" G450 Steel	0.075" G450 Steel	0.094" G450 Steel
10-16 x 5/8	2.8	3.5	4.3	5.8	8.3