


TRAK-PRO GNH NAILER PINS

FOR CONCRETE & STEEL

CERTIFICATION

TECHNICAL DATA

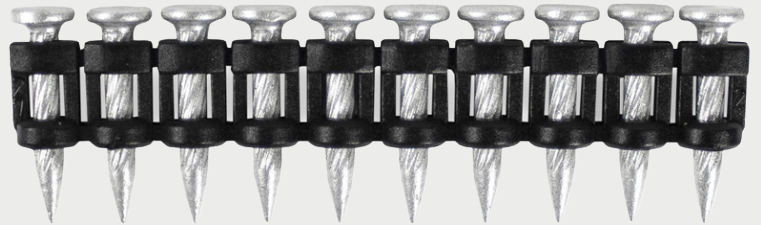

FOR INSTALL SUPPORT
sales@allfasteners.com



FOR SPECIFICATION SUPPORT
certs@allfasteners.com



FOR CUSTOMER SUPPORT
888.859.6060



TRAK-PRO GNH NAILER PINS

FOR CONCRETE & STEEL

Trak-Pro GNH Nailer Pins are made out of high carbon steel ensuring strength and hardness, for use in concrete and light-gauge steel. Use with Trak-Pro Battery Nailer to fix steel plate to steel plate or to concrete.



KEY BENEFITS

- Made of High Carbon Steel
- High Strength & Hardness
- For Use in Concrete & Light-Gauge Steel

TECHNICAL SPECIFICATIONS

TABLE 1: ALLOWABLE TENSION LOADS IN NORMAL WEIGHT CONCRETE

PART #	SHANK DIAMETER in. (mm)	MIN. PENETRATION in. (mm)	MIN. EDGE DISTANCE in. (mm)	MIN. SPACING in. (mm)	ALLOWABLE TENSION LOAD - lbs. (kN)			
					$f'_c=2,500$ psi (17.2 MPa)	$f'_c=3,000$ psi (20.7 MPa)	$f'_c=4,000$ psi (27.6 MPa)	$f'_c=5,000$ psi (34.5 MPa)
1GNH	0.106 (2.7)	5/8 (16)	3 (76)	4 (102)	25 (0.11)	30 (0.13)	45 (0.20)	45 (0.20)
		3/4 (19)	3 (76)	4 (102)	30 (0.13)	30 (0.13)	30 (0.13)	30 (0.13)

1. The fasteners must not be driven until the concrete has reached the designated minimum compressive strength.
2. Minimum concrete thickness must be three times the fastener embedment into the concrete.
3. The allowable tension values are only for the fastener in the concrete. Members connected to the concrete must be investigated in accordance with accepted design criteria.

TABLE 2: ALLOWABLE SHEAR LOADS IN NORMAL WEIGHT CONCRETE

PART #	SHANK DIAMETER in. (mm)	MIN. PENETRATION in. (mm)	MIN. EDGE DISTANCE in. (mm)	MIN. SPACING in. (mm)	ALLOWABLE SHEAR LOAD - lbs. (kN)			
					$f'_c=2,500$ psi (17.2 MPa)	$f'_c=3,000$ psi (20.7 MPa)	$f'_c=4,000$ psi (27.6 MPa)	$f'_c=5,000$ psi (34.5 MPa)
1GNH	0.106 (2.7)	5/8 (16)	3 (76)	4 (102)	25 (0.11)	25 (0.11)	25 (0.11)	25 (0.11)
		3/4 (19)	3 (76)	4 (102)	50 (0.22)	55 (0.24)	75 (0.33)	75 (0.33)

1. The fasteners must not be driven until the concrete has reached the designated minimum compressive strength.
2. Minimum concrete thickness must be three times the fastener embedment into the concrete.
3. The allowable tension values are only for the fastener in the concrete. Members connected to the concrete must be investigated in accordance with accepted design criteria.

TABLE 3: ALLOWABLE TENSION LOADS IN SAND-LIGHTWEIGHT CONCRETE OVER STEEL DECK

PART #	SHANK DIAMETER in. (mm)	MIN. PENETRATION in. (mm)	ALLOWABLE TENSION LOAD - lbs. (kN)		
			INSTALLED IN CONCRETE ⁴	INSTALLED THRU. 3" "W" DECK WITH 2-1/4" CONCRETE FILL ⁶	INSTALLED THRU. 1.5" "B" DECK WITH 2-1/4" CONCRETE FILL ⁷
			$f'_c=3,000$ psi (20.7 MPa) CONCRETE		
1GNH	0.106 (2.7)	5/8 (16)	75 (0.33)	60 (0.27)	65 (0.29)
		3/4 (19)	105 (0.47)	60 (0.27)	130 (0.58)

1. The fastener shall not be driven until the concrete has reached the designated compressive strength.
2. The allowable tension values are for the fastener only. Members connected to the concrete must be investigated separately in accordance with accepted design criteria.
3. Steel deck must be minimum 20 gauge and have a minimum yield strength of 38,000 psi.
4. The minimum fastener spacing is 4". The minimum edge distances are 3 1/2" and 3" for powder-actuated fasteners and gas-actuated fasteners, respectively.
5. The fastener shall be installed minimum 1 1/2" from the edge of flute and 4" from the end of the deck. The minimum fastener spacing is 4".
6. The fastener shall be installed minimum 1" from the edge of flute and 3" from the end of the deck. The minimum fastener spacing is 4".
7. The fastener shall be installed minimum 7/8" from the edge of flute. For inverted 1.5" "B" deck configuration, the fastener must be a minimum of 1" from the edge of flute. Fastener must be installed minimum 3" from the end of the deck. The minimum fastener spacing is 4".
8. The fastener shall be installed minimum 7/8" from the edge of flute and 4" from the end of the deck. The minimum fastener spacing is 4".



TRAK-PRO GNH NAILER PINS

FOR CONCRETE & STEEL

INSTALLATION SPECIFICATIONS

TABLE 4: ALLOWABLE SHEAR LOADS IN SAND-LIGHTWEIGHT CONCRETE OVER STEEL DECK

PART #	SHANK DIAMETER in. (mm)	MIN. PENETRATION in. (mm)	ALLOWABLE SHEAR LOAD - lbs. (kN)		
			INSTALLED IN CONCRETE ⁴	INSTALLED THRU. 3" "W" DECK WITH 2-1/4" CONCRETE FILL ⁶	INSTALLED THRU. 1.5" "B" DECK WITH 2-1/4" CONCRETE FILL ⁷
			$f'_c = 3,000$ psi (20.7 MPa) CONCRETE		
1GNH	0.106 (2.7)	5/8 (16)	35 (0.16)	180 (0.60)	195 (0.87)
		3/4 (19)	140 (0.62)	180 (0.60)	270 (1.20)

- The fastener shall not be driven until the concrete has reached the designated compressive strength.
- The allowable tension values are for the fastener only. Members connected to the concrete must be investigated separately in accordance with accepted design criteria.
- Steel deck must be minimum 20 gauge and have a minimum yield strength of 38,000 psi.
- The minimum fastener spacing is 4". The minimum edge distances are 3 1/2" and 3" for powder-actuated fasteners and gas-actuated fasteners, respectively.
- The fastener shall be installed minimum 1 1/2" from the edge of flute and 4" from the end of the deck. The minimum fastener spacing is 4".
- The fastener shall be installed minimum 1" from the edge of flute and 3" from the end of the deck. The minimum fastener spacing is 4".
- The fastener shall be installed minimum 7/8" from the edge of flute. For inverted 1.5" "B" deck configuration, the fastener must be a minimum of 1" from the edge of flute. Fastener must be installed minimum 3" from the end of the deck. The minimum fastener spacing is 4".
- The fastener shall be installed minimum 7/8" from the edge of flute and 4" from the end of the deck. The minimum fastener spacing is 4".

TABLE 5: ALLOWABLE TENSION & SHEAR LOADS IN HOLLOW & GROUT FILLED CMU^{4,5}

PART #	SHANK DIAMETER in. (mm)	MIN. PENETRATION in. (mm)	MIN. EDGE DISTANCE in. (mm)	8" HOLLOW CMU	
				TENSION LOAD	SHEAR LOAD
				ALLOWABLE lbs. (kN)	ALLOWABLE lbs. (kN)
1GNH	0.106 (2.7)	5/8 (16)	3 (76)	35 ¹ (0.16)	60 ¹ (0.27)

- Allowable values for fasteners in hollow lightweight concrete masonry units conforming to ASTM C90.
- Allowable values for fasteners in hollow medium-weight concrete masonry units conforming to ASTM C90.
- Allowable values for fasteners in grout-filled lightweight concrete masonry units conforming to ASTM C90 with coarse grout conforming to ASTM C746.
- The minimum allowable nominal size of the CMU must be 8" high by 8" wider by 16" long, with a minimum 1 1/4"-thick face shell thickness.
- Allowable values are for fasteners installed in the center of a CMU face shell. See Figure 1 for the applicable placement zone. Only one fastener may be installed at each cell.
- Minimum penetration is measured from the outside face of the CMU.
- Allowable values are for the fastener only. Members connected to the CMU must be investigated separately in accordance with accepted design criteria.

TABLE 6: ALLOWABLE TENSION LOADS IN STEEL¹

PART #	SHANK DIAMETER in. (mm)	MIN. EDGE DISTANCE in. (mm)	MIN. SPACING in. (mm)	MIN. STEEL STRENGTH ASTM	ALLOWABLE TENSION LOAD - lbs. (kN)		
					1/8" THICK STEEL	3/16" THICK STEEL	1/4" THICK STEEL
1GNH	0.106 (2.7)	0.5 (13)	1 (25)	A36	125 (0.56)	210 (0.93)	220 (0.98)
		0.5 (13)	1 (25)	A572 Gr. 50 or A992	—	225 (1.00)	185 (0.82)

- The entire pointed portion of the fastener must penetrate through the steel to obtain the tabulated values, unless otherwise indicated.
- The allowable tension values are for the fastener only. Members connected to the steel must be investigated separately in accordance with accepted design criteria.
- Steel strength must comply with the minimum requirements of ASTM A 36 (Fy = 36 ksi, Fu = 58 ksi), ASTM A 572, Grade 50 (Fy = 50 ksi, Fu = 65 ksi), or ASTM A992 (Fy = 50 ksi, Fu = 65 ksi).
- Based upon minimum penetration depth of 0.46" (11.7 mm).
- Based upon minimum penetration depth of 0.58" (14.7 mm).
- Based upon minimum penetration depth of 0.36" (9.1 mm).
- The fastener must be driven to where the point of the fastener penetrates through the steel.
- Based upon minimum penetration depth of 0.35" (8.9 mm).
- Based upon minimum penetration depth of 0.25" (6.4 mm).
- For stepped shank fasteners: (Diameter of shank above the step)/(Diameter of shank below the step.)



TRAK-PRO GNH NAILER PINS

FOR CONCRETE & STEEL

TECHNICAL SPECIFICATIONS

TABLE 7: ALLOWABLE SHEAR LOADS IN STEEL¹

PART #	SHANK DIAMETER in. (mm)	MIN. EDGE DISTANCE in. (mm)	MIN. SPACING in. (mm)	MIN. STEEL STRENGTH ASTM	ALLOWABLE SHEAR LOAD - lbs. (kN)		
					1/8" THICK STEEL	3/16" THICK STEEL	1/4" THICK STEEL
1GNH	0.106 (2.7)	0.5 (13)	1 (25)	A36	285 (1.27)	225 (1.00)	205 (0.91)
		0.5 (13)	1 (25)	A572 Gr. 50 or A992	—	250 (1.11)	145 (0.64)

1. The entire pointed portion of the fastener must penetrate through the steel to obtain the tabulated values, unless otherwise indicated.
2. The allowable tension values are for the fastener only. Members connected to the steel must be investigated separately in accordance with accepted design criteria.
3. Steel strength must comply with the minimum requirements of ASTM A 36 (Fy = 36 ksi, Fu = 58 ksi), ASTM A 572, Grade 50 (Fy = 50 ksi, Fu = 65 ksi), or ASTM A992 (Fy = 50 ksi, Fu = 65 ksi).
4. Based upon minimum penetration depth of 0.46" (11.7 mm).
5. Based upon minimum penetration depth of 0.58" (14.7 mm).
6. Based upon minimum penetration depth of 0.36" (9.1 mm).
7. The fastener must be driven to where the point of the fastener penetrates through the steel.
8. Based upon minimum penetration depth of 0.35" (8.9 mm).
9. Based upon minimum penetration depth of 0.25" (6.4 mm).
10. For stepped shank fasteners: (Diameter of shank above the step)/(Diameter of shank below the step.)

ORDERING INFORMATION

TABLE 8: ORDERING INFORMATION 1GNH SPIRAL SHANK HARDENED PINS FOR CONCRETE & STEEL

PART NUMBER	SIZE	FINISH	QTY/BOX
1GNH034	3/4 x .109 Spiral Shank Ballistic Point Hardened Pins	Mechanical Galvanized	1000
1GNH100	1 x .109 Spiral Shank Ballistic Point Hardened Pins	Mechanical Galvanized	1000
1GNH114	1-1/4 x .109 Spiral Shank Ballistic Point Hardened Pins	Mechanical Galvanized	1000

TABLE 9: ORDERING INFORMATION 1GNS STEP SHANK HARDENED PINS FOR STEEL

PART NUMBER	SIZE	FINISH	QTY/BOX
1GNS012	1/2 x .120 Step Shank Ballistic Point Hardened Pins Mechanical Galvanized	Mechanical Galvanized	1000

TOOL INFORMATION

**TABLE 10: ORDERING INFORMATION 9BE40 TRAK-PRO CONCRETE BATTERY NAILER**

PART NUMBER	TOOL	KIT INCLUDES	QTY/BOX
9BE40	Cordless 18V Battery Concrete Nailer Kit	30-Pin Track, 2 Batteries & Charger	1000